

EE 31806171045

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No. AT9-98-920

Date: 5-6-99

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of Inventor(s):

Michael Richard Cooper, Rabindranath Dutta, and Kelvin Roderick Lawrence**For: METHOD AND APPARATUS FOR CONVERTING PROGRAMS AND SOURCE
CODE FILES WRITTEN IN A PROGRAMMING LANGUAGE TO EQUIVALENT
MARKUP LANGUAGE FILES**

Enclosed are also:

☒ 33 Pages of Specification including an Abstract
☒ 7 Pages of Claims
☒ 23 Sheet(s) of Drawings
☒ A Declaration and Power of Attorney
☒ Form PTO 1595 and assignment of the invention to IBM Corporation

CLAIMS AS FILED

FOR	Number Filed		Number Extra		Rate		Basic Fee (\$760)
Total Claims	26	-20 =	6	X	\$ 18	=	\$108.00
Independent Claims	10	-3 =	7	X	\$ 78	=	\$546.00
Multiple Dependent Claims	0			X	\$260	=	\$ 0
Total Filing Fee							= \$1,414.00

☒ Please charge \$1,414.00 to IBM Corporation, Deposit Account No. 09-0447.☒ The Commissioner is hereby authorized to charge payment of the following fees associated with the communication or credit any over payment to IBM Corporation, Deposit Account No. 09-0447. A duplicate copy of this sheet is enclosed.☒ Any additional filing fees required under 37CFR § 1.16.☒ Any patent application processing fees under 37CFR § 1.17.

Respectfully,

Jeffrey S. LaBaw

Reg. No. 31,638

Intellectual Property Law Dept.

IBM Corporation

11400 Burnet Road 4054

Austin, Texas 75758

Telephone: (512) 823-0494

JC542 U.S. PTO
09/306189

05/06/99

05/06/99

JC542 U.S. PTO
05/06/99

Docket No. AT9-98-920

**METHOD AND APPARATUS FOR CONVERTING PROGRAMS AND SOURCE
CODE FILES WRITTEN IN A PROGRAMMING LANGUAGE TO EQUIVALENT
MARKUP LANGUAGE FILES**

5

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is related to Application
Serial Number (Attorney Docket Number AT9-98-921), filed
10 (concurrently herewith), entitled "Method and Apparatus
for Converting Application Programming Interfaces Into
Equivalent Markup Language Elements," hereby incorporated
by reference.

15

BACKGROUND OF THE INVENTION

1. Technical Field:

The present invention relates generally to an
improved data processing system, and, in particular, to a
20 method and apparatus for converting a program or source
code file from a programming language to a markup
language.

2. Description of Related Art:

25 The World Wide Web (WWW, also known simply as "the
Web") is an abstract cyberspace of information that is
physically transmitted across the hardware of the
Internet. In the Web environment, servers and clients
communicate using Hypertext Transport Protocol (HTTP) to
30 transfer various types of data files. Much of this
information is in the form of Web pages identified by
unique Uniform Resource Locators (URLs) or Uniform

Docket No. AT9-98-920

Resource Identifiers (URIs) that are hosted by servers on Web sites. The Web pages are often formatted using Hypertext Markup Language (HTML), which is a file format that is understood by software applications, called Web
5 browsers. A browser requests the transmission of a Web page from a particular URL, receives the Web page in return, parses the HTML of the Web page to understand its content and presentation options, and displays the content on a computer display device. By using a Web
10 browser, a user may navigate through the Web using URLs to view Web pages.

As the Web continues to increase dramatically in size, companies and individuals continue to look for ways to enhance its simplicity while still delivering the rich
15 graphics that people desire. Although HTML is generally the predominant display format for data on the Web, this standard is beginning to show its age as its display and formatting capabilities are rather limited. If someone desires to publish a Web page with sophisticated
20 graphical effects, the person will generally choose some other data format for storing and displaying the Web page. Sophisticated mechanisms have been devised for embedding data types within Web pages or documents. At times, an author of Web content may create graphics with
25 special data types that require the use of a plug-in.

The author of Web content may also face difficulties associated with learning various data formats. Moreover, many different languages other than HTML exist for
generating presentation data, such as page description
30 languages. However, some of these languages do not lend themselves to use on the Web. Significant costs may be

Docket No. AT9-98-920

associated with mastering all of these methods.

On the other hand, the application programming interfaces (APIs) of certain operating system environments or programming environments are well-known.

5 Persons who write programs for these APIs have usually mastered the display spaces and methods of these APIs.

A standard has been proposed for Precision Graphics Markup Language (PGML), which is an eXtensible Markup Language (XML) compatible markup language. This standard
10 attempts to bridge the gap between markup languages and page description languages. Markup languages provide flexibility and power in structuring and transferring documents yet are relatively limited, by their generalized nature, in their ability to provide control
15 over the manner in which a document is displayed. PGML incorporates the imaging model common to the PostScript® language and the Portable Document Format (PDF) with the advantages of XML. However, PGML does not tap the existing skills of programmers who are very knowledgeable
20 about the syntax of many different programming languages which are used to define and implement graphical presentation capabilities on various computer platforms.

Therefore, it would useful to have a method for adapting well-known APIs in some manner for use as a
25 Web-based page description language. It would be particularly advantageous for the method to provide the ability to produce documents that conform with evolving markup language processing standards.

Docket No. AT9-98-920

SUMMARY OF THE INVENTION

The present invention provides a method and
5 apparatus for converting programs and source code files
written in a programming language to equivalent markup
language files. The conversion may be accomplished by a
static process or by a dynamic process. In a static
process, a programming source code file is converted by
10 an application to a markup language file. A document
type definition file for a markup language is parsed; a
source code statement from a source code file is parsed;
an element defined in the document type definition file
is selected based on an association between the element
15 and an identifier of a routine in the source code
statement; and the selected element is written to a
markup language file. In a dynamic process, the program
is executed to generate the markup language file that
corresponds to the source code file or presentation steps
20 of the program. The application program is executed; a
document type definition file for a markup language is
provided as input; an element defined in the document
type definition file is selected based on a routine
called by the application program; and the selected
25 element is written to a markup language file.

Docket No. AT9-98-920

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objectives and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

10 **Figure 1** is a pictorial representation depicting a data processing system in which the present invention may be implemented in accordance with a preferred embodiment of the present invention;

15 **Figure 2** is a block diagram illustrating a data processing system in which the present invention may be implemented;

Figure 3 is a block diagram depicting a pictorial representation of a distributed data processing system in which the present invention may be implemented;

20 **Figures 4A-4B** is a block diagram depicting a system for converting between programming language source code files and markup language files;

25 **Figure 5** is a flowchart depicting a process for converting a programming language source code file to a markup language file;

Figure 6 is a flowchart depicting a process for converting a markup language file into a programming language source code file;

30 **Figure 7** is an example of a DTD for the programming language markup language;

Figure 8 is an example of a program in which the

Docket No. AT9-98-920

program is written in the programming language that may be expected within a programming language source code file;

Figures 9A and 9B are examples of generated markup language files;

Figures 10A-10B are block diagrams depicting software components within an executable environment that may support the execution of an application program;

Figure 11 is a flowchart depicting a process for dynamically converting a program into a markup language file;

Figure 12 is a flowchart depicting the process within an extended API for generating markup language statements;

Figure 13 is a block diagram depicting a Java run-time environment that includes a programming language to markup language converter application;

Figure 14 is an example of an extended graphics class;

Figures 15A-15E is an example of a DTD for the Java graphics markup language;

Figures 16A-16B is a list providing examples of methods within the graphics class that are supported within the Java graphics markup language DTD;

Figure 17 is a portion of a Java graphics markup language DTD;

Figure 18 is a portion of a Java program that invokes methods within the graphics class of a Java Virtual Machine; and

Figure 19 is an example of a markup language file that uses the Java Graphics Markup Language.

Docket No. AT9-98-920

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

5

With reference now to the figures, **Figure 1**, a pictorial representation depicts a data processing system in which the present invention may be implemented in accordance with a preferred embodiment of the present invention. A personal computer **100** is depicted which includes a system unit **110**, a video display terminal **102**, a keyboard **104**, storage devices **108**, which may include floppy drives and other types of permanent and removable storage media, and mouse **106**. Additional input devices may be included with personal computer **100**. Personal computer **100** can be implemented using any suitable computer, such as an IBM Aptiva™ computer, a product of International Business Machines Corporation, located in Armonk, New York. Although the depicted representation shows a personal computer, other embodiments of the present invention may be implemented in other types of data processing systems, such as network computers, Web based television set top boxes, Internet appliances, etc. Computer **100** also preferably includes a graphical user interface that may be implemented by means of systems software residing in computer readable media in operation within computer **100**.

With reference now to **Figure 2**, a block diagram illustrates a data processing system in which the present invention may be implemented. Data processing system **200**

Docket No. AT9-98-920

is an example of a client computer. Data processing system **200** employs a peripheral component interconnect (PCI) local bus architecture. Although the depicted example employs a PCI bus, other bus architectures such as
5 Micro Channel and ISA may be used. Processor **202** and main memory **204** are connected to PCI local bus **206** through PCI bridge **208**. PCI bridge **208** also may include an integrated memory controller and cache memory for processor **202**. Additional connections to PCI local bus **206** may be made
10 through direct component interconnection or through add-in boards. In the depicted example, local area network (LAN) adapter **210**, SCSI host bus adapter **212**, and expansion bus interface **214** are connected to PCI local bus **206** by direct component connection. In contrast, audio adapter **216**,
15 graphics adapter **218**, and audio/video adapter **219** are connected to PCI local bus **206** by add-in boards inserted into expansion slots. Expansion bus interface **214** provides a connection for a keyboard and mouse adapter **220**, modem **222**, and additional memory **224**. SCSI host bus
20 adapter **212** provides a connection for hard disk drive **226**, tape drive **228**, and CD-ROM drive **230**. Typical PCI local bus implementations will support three or four PCI expansion slots or add-in connectors.

An operating system runs on processor **202** and is used
25 to coordinate and provide control of various components within data processing system **200** in **Figure 2**. The operating system may be a commercially available operating system such as OS/2, which is available from International Business Machines Corporation. "OS/2" is a trademark of
30 International Business Machines Corporation. An object

Docket No. AT9-98-920

oriented programming system such as Java may run in conjunction with the operating system and provides calls to the operating system from Java programs or applications executing on data processing system **200**. "Java" is a
5 trademark of Sun Microsystems, Inc. Instructions for the operating system, the object-oriented operating system, and applications or programs are located on storage devices, such as hard disk drive **226**, and may be loaded into main memory **204** for execution by processor **202**.

10 Those of ordinary skill in the art will appreciate that the hardware in **Figure 2** may vary depending on the implementation. Other internal hardware or peripheral devices, such as flash ROM (or equivalent nonvolatile memory) or optical disk drives and the like, may be used
15 in addition to or in place of the hardware depicted in **Figure 2**. Also, the processes of the present invention may be applied to a multiprocessor data processing system.

For example, data processing system **200**, if
20 optionally configured as a network computer, may not include SCSI host bus adapter **212**, hard disk drive **226**, tape drive **228**, and CD-ROM **230**. In that case, the computer, to be properly called a client computer, must include some type of network communication interface,
25 such as LAN adapter **210**, modem **222**, or the like. As another example, data processing system **200** may be a stand-alone system configured to be bootable without relying on some type of network communication interface, whether or not data processing system **200** comprises some
30 type of network communication interface. As a further example, data processing system **200** may be a Personal

Docket No. AT9-98-920

Digital Assistant (PDA) device which is configured with ROM and/or flash ROM in order to provide non-volatile memory for storing operating system files and/or user-generated data.

5 The depicted example in **Figure 2** and above-described examples are not meant to imply architectural limitations.

With reference now to **Figure 3**, a block diagram depicts a pictorial representation of a distributed data
10 processing system in which the present invention may be implemented. Distributed data processing system **300** is a network of computers in which the present invention may be implemented. Distributed data processing system **300**
15 contains a network **302**, which is the medium used to provide communications links between various devices and computers connected together within distributed data processing system **300**. Network **302** may include permanent connections, such as wire or fiber optic cables, or temporary connections made through telephone connections.

20 In the depicted example, a server **304** is connected to network **302** along with storage unit **306**. In addition, clients **308**, **310**, and **312** also are connected to a network **302**. These clients **308**, **310**, and **312** may be, for example, personal computers or network computers. For purposes of
25 this application, a network computer is any computer, coupled to a network, which receives a program or other application from another computer coupled to the network. In the depicted example, server **304** provides data, such as boot files, operating system images, and applications to
30 clients **308-312**. Clients **308**, **310**, and **312** are clients to

Docket No. AT9-98-920

server **304**. Distributed data processing system **300** may include additional servers, clients, and other devices not shown. In the depicted example, distributed data processing system **300** is the Internet with network **302** representing a worldwide collection of networks and gateways that use the TCP/IP suite of protocols to communicate with one another. At the heart of the Internet is a backbone of high-speed data communication lines between major nodes or host computers, consisting of thousands of commercial, government, educational and other computer systems that route data and messages. Of course, distributed data processing system **300** also may be implemented as a number of different types of networks, such as for example, an intranet, a local area network (LAN), or a wide area network (WAN). **Figure 3** is intended as an example, and not as an architectural limitation for the present invention.

Internet, also referred to as an "internetwork", is a set of computer networks, possibly dissimilar, joined together by means of gateways that handle data transfer and the conversion of messages from the sending network to the protocols used by the receiving network (with packets if necessary). When capitalized, the term "Internet" refers to the collection of networks and gateways that use the TCP/IP suite of protocols.

Currently, the most commonly employed method of transferring data over the Internet is to employ the World Wide Web environment, also called simply "the Web". Other Internet resources exist for transferring information, such as File Transfer Protocol (FTP) and Gopher, but have not achieved the popularity of the Web. In the Web

Docket No. AT9-98-920

environment, servers and clients effect data transaction using the Hypertext Transfer Protocol (HTTP), a known protocol for handling the transfer of various data files (e.g., text, still graphic images, audio, motion video, etc.). Information is formatted for presentation to a user by a standard page description language, the Hypertext Markup Language (HTML). In addition to basic presentation formatting, HTML allows developers to specify "links" to other Web resources, usually identified by a Uniform Resource Locator (URL). A URL is a special syntax identifier defining a communications path to specific information. Each logical block of information accessible to a client, called a "page" or a "Web page", is identified by a URL.

The URL provides a universal, consistent method for finding and accessing this information, not necessarily for the user, but mostly for the user's Web "browser". A browser is a software application for requesting and receiving content from the Internet or World Wide Web. Usually, a browser at a client machine, such as client 308 or data processing system 200, submits a request for information identified by a URL. Retrieval of information on the Web is generally accomplished with an HTML-compatible browser. The Internet also is widely used to transfer applications to users using browsers. With respect to commerce on the Web, consumers and businesses use the Web to purchase various goods and services. In offering goods and services, some companies offer goods and services solely on the Web while others use the Web to extend their reach. Information about the World Wide Web can be found at the Web site of the World Wide Web

Docket No. AT9-98-920

Consortium at <http://www.w3.org>.

With reference now to **Figures 4A-4B**, a block diagram depicts a system for converting between programming language source code files and markup language files.

5 Converter **400** provides functionality for converting between program language source code files and markup language files. Converter **400** accepts as input a Program Language Markup Language (PLML) Document Type Definition (DTD) file.

10 A DTD file contains the rules for applying markup language to documents of a given type. It is expressed by markup declarations in the document type declaration. The declaration contains or points to markup declarations that provide a grammar for a class of documents. The
15 document type declaration can point to an external subset (a special kind of external entity) containing markup declarations, or can contain the markup declarations directly in an internal subset, or can do both. The DTD for a document consists of both subsets taken together.
20 In other words, a DTD which provides a grammar, a body of rules about the allowable ordering of a document's "vocabulary" of element types, is found in declarations within a set of internal and external sources. In some instances, the DTD for a particular document may be
25 included within the document itself.

Although the examples are provided using XML (eXtensible Markup Language), certain other markup languages that are compatible with the Standard Generalized Markup Language (SGML) family of languages
30 may be used to implement the present invention. The SGML-compatible language should offer Document Type

Docket No. AT9-98-920

Definition (DTD) support so that the syntax and meaning of the tags within the system may be flexibly changed. The input file does not necessarily have to be a DTD as long as the input file has the ability to flexibly
5 specify the grammar or syntax constructs of a language for input into the converter. For example, although Hypertext Markup Language (HTML) is within the SGML family of languages, it does not offer DTD support and does not have the flexibility necessary for the present
10 invention.

PLML is an XML-compatible language for a particular type of programming language. Multiple DTDs may be specified so that a data processing system has at least one DTD per programming language.

15 More information about XML may be found in DuCharme, *XML: The Annotated Specification*, January 1999, herein incorporated by reference.

In the example of **Figure 4A**, converter **400** references PLML DTD file **402** as an external entity.
20 Converter **400** uses the grammar in PLML DTD file **402** to generate a file that is consistent with the grammar within PLML DTD file **402**.

Converter **400** also accepts as input a programming language source code file that contains programming
25 language statements that are to be converted or translated. Using PLML DTD file **402** as a guide for translating programming language statements in programming language source code file **404**, converter **400** generates markup language file **406**, which is essentially
30 a markup language document.

Each markup language document has both a logical and

2025 RELEASE UNDER E.O. 14176

Docket No. AT9-98-920

a physical structure. Physically, the document is composed of units called entities. An entity may refer to other entities to cause their inclusion in the document. Logically, the document is composed of
5 declarations, elements, comments, character references, and processing instructions, all of which are indicated in the document by explicit markup. Converter **400** may output a markup language document that consists of a single entity or file or, alternatively, multiple
10 entities in multiple files. Examples of a DTD, source code file, and markup language file are further described below.

Figure 4B shows PLML-MLPL converter **400** operating in a "reverse" manner with respect to **Figure 4A**. Converter
15 **400** accepts PLML DTD file **402** as input in a manner similar to **Figure 4A**. However, in this example, converter **400** accepts markup language file **410** as input and generates programming language source code file **412** as output. Converter **400** is able to "reverse" the
20 direction of inputs and outputs based on the association between a programming language and a markup language provided by the PLML DTD file. The association between the programming language and the markup language through the DTD file is described in more detail further below.

25 Converter **400** may operate in one of two manners. In the first method, a static conversion process may read programming language source code file **404** or markup language file **410**, depending on the direction of the conversion, and parse each statement within the input
30 files on an individual basis. In the second method, a dynamic conversion process executes programming language

Docket No. AT9-98-920

source code file **404** in an interpretive process that generates markup language output as a consequence of the execution of the programming language code.

Alternatively, converter **400** provides a special execution
5 environment for dynamically converting the calls within an executable file compiled from programming language source code file **404**. Each of these methods of conversion are explained in further detail below.

With reference now to **Figure 5**, a flowchart depicts
10 a process for converting a programming language source code file to a markup language file. The method depicted in **Figure 5** is similar to that described with respect to **Figure 4A**. The process begins with PLML-MLPL converter reading the PLML DTD file (step **502**). The converter
15 parses the DTD file into an internal data structure (step **504**). Parsing a DTD into an internal data structure such as an object tree is well known in the art. The converter opens a markup language file and writes a prolog to the markup language file (step **506**). The
20 converter then opens the programming language source code file in order to obtain programming language source code statements that will be converted to markup language statements (step **508**).

The converter then reads a source code statement
25 (step **510**) and uses the PLML element in the previously generated internal data structure that corresponds to the function, method, procedure, or API within the source code statement (step **512**). An API is one or more routines, subroutines, functions, methods, procedures,
30 libraries, classes, object-oriented objects, or other

Docket No. AT9-98-920

callable or invokable software objects used by an application program or other software object to direct the performance of procedures by the computer's operating system or by some other software object. Using the

5 information in the corresponding PLML element, the converter generates an element with content derived from the source code statement (step **514**). The content is derived from the source code statement by parsing the

10 the art. The converter then outputs the generated markup language element to the markup language file (step **516**). A determination is then made as to whether more source code statements are in the programming language source code file that need to be processed into markup language

15 statements (step **518**). If so, then the process branches back to step **510** to repeat the process for another source code statement. If not, then the converter concludes the markup language file by writing the appropriate terminating tags or information (step **520**).

20 With reference now to **Figure 6**, a flowchart depicts a process for converting a markup language file into a programming language source code file. The process depicted in **Figure 6** is similar to the process discussed with respect to **Figure 4B**. The process begins with the

25 PLML converter reading the PLML DTD file (step **602**). The converter parses the DTD file into internal data structures, such as an object tree representing the hierarchy of the elements within the DTD file (step **604**). The converter then opens the markup language file in

30 order to use the markup language file as a source of input for generation of the programming language source

Docket No. AT9-98-920

code file (step **606**).

The converter reads an element from the markup language file (step **608**) and uses the stored PLML element within the internal data structure that corresponds to the inputted element from the markup language file that is currently being processed (step **610**). Using the previously stored, corresponding PLML element with its associated information concerning the correspondence between PLML elements and source code statements, the converter generates a source code statement with content from the element currently being processed (step **612**). The converter then outputs the generated source code statement to the source code file (step **614**). A determination is then made as to whether there are other elements within the markup language file that need to be processed (step **616**). If so, then the process branches back to step **608** and repeats the process for another element within the markup language file. If not, then the converter concludes the source code file (step **618**).

With reference now to **Figure 7**, an example of a DTD for the programming language markup language is provided. Entity **702** provides a root entity for a PLML document. Element **704** provides a root element for a PLML document. Element **706** provides a markup language element that corresponds to a functionA that may be expected to be found within a programming language source code file. Element **706** for functionA also shows arg1 and arg2 as the arguments that may be expected to be found in a source code statement when a source code statement is parsed and found to contain a call to functionA. The CDATA

Docket No. AT9-98-920

attribute type is a character string attribute type that, in this case, is required to be found in a markup language element for functionA. Element **706** is written in such a way that arg1 and arg2 must appear as attribute types describing the corresponding function call arguments for a source code statement that contains a call to functionA. Element **708** is similar to element **706**. Element **708** provides for the element within a markup language file that corresponds to a call to functionB within a source code statement that may be expected to be found in a programming language source code file. Element **708** contains a CDATA attribute type named arg1 for providing the argument value of the argument in the source code statement containing a call to functionB.

With reference now to **Figure 8**, an example of a program is provided in which the program is written in the programming language that may be expected within a programming language source code file. Program **800** contains a simple program of a few statements. Statements **802** are initial program statements that commence and initiate the body of the program. Statement **804** contains a call to functionA and statement **806** contains a call to functionB in a manner which corresponds to the declaration of elements **706** and **708** in **Figure 7**.

With reference now to **Figures 9A** and **9B**, examples of generated markup language files are provided. These markup language files may have been generated using a process similar to that described in **Figures 4A** and **5**. A

Docket No. AT9-98-920

PLML DTD file, similar to that shown in **Figure 7**, may have been used as input to a converter that read a programming language source code file, similar to that shown in **Figure 8**, in order to generate the markup language shown as markup language statements **900** and **920** in the markup language files of **Figures 9A** and **9B**.

Statements **902** provide the prolog for the markup language file or document. The prolog provides information about the document, such as the version of the markup language being used, the name of the file that contains the DTD, etc. Statement **904** is the start tag for the content of the markup language file. Statements **906** are comments which contain content that is identical to statements **802** in **Figure 8** that describe the declaration and initialization of the program shown within **Figure 8**. Statement **908** provides an element for functionA that corresponds to the call to functionA in statement **804** in the program shown in **Figure 8**. Statement **910** shows an element for functionB that corresponds to the call to functionB in the program of **Figure 8**. Statements **908** and **910** also contain attributes providing the values of arguments that correspond to the values of the arguments in the function calls of the program in **Figure 8**. Statement **912** contains the conclusion of the program in **Figure 8**. Statement **914** provides the end tag for the content of the markup language file.

Figure 9B shows an example of a markup language file that has been converted from program **800** shown in **Figure 8**. The markup language file of **Figure 9B** is similar to

Docket No. AT9-98-920

the markup language file of **Figure 9A** except that the markup language file of **Figure 9B** does not contain the declaration and initialization statements of computer program **800** as comment statements in the markup language
5 file in a manner similar to those shown in **Figure 9A**.

Statements **922** provide the prolog for the markup language file. Statement **924** provides the start tag for the content for the markup language file. Statement **926** provides an element and an attribute list for functionA
10 similar to the call to functionA in computer program **800**. Statement **928** provides an element and an attribute list for functionB similar to the call to functionB and statement **806** in computer program **800**. Statement **930** provides the end tag to the markup language file.

15 The differences between **Figures 9A** and **9B** are minor from the perspective of the markup language file. **Figure 9A** contains additional comment statements that are not found in **Figure 9B**. These comment statements do not affect the parsing of the markup language file. However,
20 by placing some of the source code statements as comment statements in the markup language file, a converter which converts the markup language file to a programming language source code file in a "reverse" direction may use these comment statements to regenerate the majority
25 of the program that was the origin for the markup language file. In other words, these comment statements may provide for a complete conversion cycle from a programming language source code file to a markup language file and back to a programming language source
30 code file without the loss of any information necessary

Docket No. AT9-98-920

to compile the programming language source code file.

Rules for the inclusion of these other statements within a markup language file may be used to determine which portions of the original programming language source code file should be included during a conversion process to a markup language file. These rules may vary depending upon the programming language and the markup language being used in the conversion process. For example, statements **804** and **806** in **Figure 8** contain the use of a temporary variable named "TEMP". However, during the conversion process of computer program **800** into markup language file **900**, information concerning the use of the temporary variable was dropped after a determination that inclusion of other information concerning the temporary variable was not necessary. Alternatively, the use of the temporary variable within computer program **800** may have been stored within additional comment statements in markup language file **900**.

Figures 5 and **6** described a method for a static conversion process for programming language source code files and markup language files. As an alternative method, a converter may generate a markup language file using a dynamic conversion process that will be described with respect to **Figures 10A-14**.

With reference now to **Figures 10A-10B**, block diagrams depict software components within an executable environment that may support the execution of an application program. In **Figure 10A**, operating system **1000** contains API **1002** that may be called by executable application program **1004** during the course of its

Docket No. AT9-98-920

execution. In this manner, executable application **1004** is supported by API **1002** and operating system **1000**.

In **Figure 10B**, operating system **1010** has API **1012** and extended API **1014** that may be called by executable application program **1016**. Extended API **1014** may provide an API that is similar to API **1012** yet also provides additional capabilities that are not necessary in a standard execution environment. In this manner, executable application program **1016** may be supported during its execution of a dynamic conversion process that uses the additional functionality in extended API **1014**.

With reference now to **Figure 11**, a flowchart depicts a process for dynamically converting a program into a markup language file. The process begins when the application program is loaded into an execution environment with extended APIs (step **1102**). The execution of the program is initiated (step **1104**), and the procedures within the executing program invoke the procedures within or that constitute the extended API (step **1106**). The extended API procedures then generate the markup language statements (step **1108**). Steps **1106** and **1108** essentially describe steps that may be invoked multiple times during a process of generating markup language statements. The program then completes its execution (step **1110**). In this manner, the executable program is allowed to execute in a normal fashion although within an environment with extended APIs. The extended APIs then provide the functionality for generating the markup language statements in a manner that is further described below.

Docket No. AT9-98-920

With reference now to **Figure 12**, a flowchart depicts the process within an extended API for generating markup language statements. The process begins when the executable program contains a procedure that calls the

5 API procedure in the extended API environment (step **1202**). Each API procedure within the extended API environment is responsible for parsing a PLML DTD (step **1204**). In this case, the burden of locating the appropriate PLML element that corresponds to the API

10 procedure is placed within the API procedure itself. The location of the PLML DTD file may be obtained through a global environment variable or some other well known method for providing global information to multiple procedures. Alternatively, the PLML DTD may have been

15 parsed into an internal data structure, such as an object tree, and each API procedure is responsible for traversing the object tree or other internal data structure to locate the appropriate PLML element needed for the API procedure.

20 The API procedure then gets the syntax of its corresponding PLML element from the appropriate location (step **1206**). The API procedure generates a PLML statement with appropriate attributes that correspond to the parameters that have been passed into the API

25 procedure during the API procedure call (step **1208**). Once the PLML statement is generated, the API procedure may optionally perform its normal execution sequence that would be found in the standard API without the extended API functionality for generating a markup language

30 statement (step **1210**). The API procedure then completes its execution (step **1212**) and returns to the calling

Docket No. AT9-98-920

procedure of the executable program. The procedure within the executable program that invoked the API then continues with its execution within the normal control flow of the executable program (step **1214**). In this manner, the executable program is not modified in order to produce the markup language output. The extended API provides an interface similar to the standard API while including additional functionality that generates the desired markup language output. This additional functionality is described in further detail with specific examples in **Figures 13-19**.

With reference now to **Figure 13**, a block diagram depicts a Java run-time environment that includes a programming language to markup language converter application. System **1300** contains a platform specific operating system **1302** that supports the execution of Java Virtual Machine (JVM) **1304**. JVM **1304** contains Graphics classes **1306** which is a set of classes that provide graphic contexts that allow an application to draw and paint images and graphical objects on various devices. The Graphics classes may be provided as part of the JDK AWT classes.

In this case, the system provides conversion from the Java programming language to the Java Graphics Markup Language (JGML). Java-JGML converter application **1308** runs within JVM **1304**. Converter **1308** is written in the Java language and may be executed within JVM **1304** through interpretation or just-in-time compilation. Converter **1308** contains extended graphics classes **1310** that provide additional functionality to graphics classes **1306** in a

Docket No. AT9-98-920

manner similar to the components depicted in **Figure 10B** and described in the methods of **Figures 11-12**. The technique of extending a Java class is well known in the art.

5 Converter application **1308** is written in the Java language yet converts a Java language program into an equivalent JGML file. In a static conversion process, converter **1308** reads Java text/graphics program file **1312** and parses the Java statements within the file in a
10 manner similar to the process described with respect to **Figures 4A** and **5**. JGML DTD file **1316** provides the grammar of the JGML that is required during the conversion process. Converter **1308** uses the DTD file and program file to generate JGML statements as output to
15 JGML equivalent text/graphics file **1314**.

When converter **1308** is used to convert a Java program to a markup language file in a static conversion process, converter **1308** does not require the additional functionality provided within extended graphics classes
20 **1310**. Converter **1308** steps through the Java language statements in program file **1312** and generates equivalent markup language statements that are placed into markup language file **1314**.

Alternatively, converter **1308** may dynamically
25 convert the Java language statements in program file **1312** into markup language statements in markup language file **1314** in a manner similar to that described in **Figures 4B, 6, 10B, 11, and 12**. In a dynamic conversion process within system **1300**, JVM **1304** may load the Java program
30 within Java program file **1312** in combination with

Docket No. AT9-98-920

extended graphics classes **1310**. Extended graphics classes **1310** may be loaded simultaneously with the Java program in program file **1312** or may be included within program file **1312** as a separate class or set of classes.

5 JVM **1304** then interprets the loaded program in the standard manner. By providing the additional functionality of Java-to-JGML conversion within extended graphics classes **1310**, the Java program within program file **1312** enables its own conversion to a markup language
10 file. In this manner, the Java program within program file **1312** may be considered its own conversion application. This manner of execution is described in further detail with respect to **Figures 14-19**.

With reference now to **Figure 14**, an example of an
15 extended graphics class is provided. Extended graphics class **1400** is similar to the extended class depicted as extended graphics class **1310** in **Figure 13**. Extended class **1400** provides portions of pseudocode that describe some of the functionality that may be required to convert
20 a Java program. Line **1402** declares that the class extends the Graphics class within a Java Virtual Machine. Method **1404** provides functionality for a drawLine method that may be expected to be found within the graphics class within the JVM. In a manner similar to that
25 described with respect to **Figure 12**, the statements in method **1404** provide the functionality for generating the desired markup language statements. Line **1406** notes that each method within the extended class is responsible for parsing the JGML DTD for the proper syntax required by
30 the method.

Docket No. AT9-98-920

In this example, line **1406** notes that the drawLine method parses and analyzes the JGML DTD for the drawLine syntax. Line **1408** shows that a JGML output statement is constructed using the syntax for the drawLine method
5 obtained from the JGML DTD and from the current parameters used by the invocation of method **1404**. Line **1410** provides a pseudocode statement for outputting the JGML markup language statement to a markup language file.

Method **1412** contains similar pseudocode for
10 generating markup language output for a clearRect method invocation. Extended class **1400** may contain many other examples of methods for converting Java language statements to markup language statements. The pseudocode within the methods of extended class **1400** may also be
15 modified so that the methods do not analyze the DTD with each invocation but rather refer to a common or global, internal data structure that contains the syntax required for each element in the JGML grammar.

In general, the DTD need not contain equivalent
20 elements for all the Java APIs. Generally, it is enough to have equivalent elements in the DTD corresponding to the abstract methods in the Java class. In the typical Java design, the other methods are internally coded in Java using the abstract methods. However, for securing a
25 performance advantage and ease of programming in the markup language, the DTD may have some selected elements corresponding to non-abstract methods of Java also. By rewriting just the abstract methods of Java to generate the markup language, all the Java API's would
30 automatically get converted to the markup language.

Figures 16A and 16B contain all the Java Graphics APIs -

Docket No. AT9-98-920

both abstract and non-abstract. The Java standard specifications indicate which of them are abstract and which are not. **Figures 15A-E** contain the DTD elements corresponding to almost all the abstract methods and some additional methods. In some cases, the DTD has merged several abstract methods, e.g., the drawImage methods, into one element. In certain cases, a few Java APIs may not need to be explicitly converted into markup language structures even if they are abstract, and they may be omitted from the markup language DTD. Hence, there is no need for the DTD and the list of Java APIs to be identical.

With reference now to **Figures 15A-15E**, an example of a DTD for the Java graphics markup language is provided. Each element within the DTD corresponds to a method within the Graphics class of the Abstract Windowing Toolkit (AWT) in the standard Java Virtual Machine.

With reference now to **Figures 16A-16B**, a list provides examples of methods within the graphics class that are supported within the Java graphics markup language DTD. A comparison of the methods listed in **Figures 16A-16B** and the elements in the Java graphics markup language DTD provides a correspondence between the methods and the elements so that the conversion of a Java language program, which contains these method calls, may be converted into appropriate elements within a markup language file.

With reference now to **Figure 17**, a portion of a Java graphics markup language DTD is provided. Element **1702** provides the syntax for a drawLine element that corresponds to a drawLine function in the graphics class

Docket No. AT9-98-920

of a Java Virtual Machine. Element **1704** provides a clearRect element that corresponds to the clearRect method in the Graphics class of the Java Virtual Machine. Element **1702** has associated attribute list **1706** that provides the syntax for including the parameters for the drawLine method within the markup language file. Element **1704** has associated attribute list **1708** that provides the syntax for including the parameters for the clearRect method within the markup language file. The syntax of the portion of the DTD provided within **Figure 17** is similar to the syntax shown and explained with respect to **Figure 7**.

With reference now to **Figure 18**, a portion of a Java program that invokes methods within the graphics class of a Java Virtual Machine is provided. Statement **1802** invokes the drawLine method with four parameters. Statement **1804** invokes the drawLine method a second time also with four parameters. Statement **1806** invokes the clearRect method with four integer parameters. The portion of the Java program depicted within **Figure 18** is similar to the depiction of a program described with respect to **Figure 8**.

With reference now to **Figure 19**, an example of a markup language file that uses the Java Graphics Markup Language is provided. Markup language file **1900** has been generated with reference to the grammar for the JGLM elements shown as DTD portion **1700** in **Figure 17** and Java language statements **1800** in **Figure 18**. Line **1902** corresponds to statement **1802** using the drawLine element **1702**. Line **1904** corresponds to statement **1804** using the

Docket No. AT9-98-920

drawLine element shown as line **1702**. Line **1906** corresponds to statement **1806** using element **1704** for the clearRect method invocation. JGML file **1900** may have been produced using DTD portion **1700** and program portion **1800** as inputs to a static conversion method or a dynamic conversion method as described above with respect to **Figure 13**.

The advantages of the present invention should be apparent in light of the detailed description provided above. An application written in a programming language is translated or converted into a markup language document in accordance with a DTD written for this purpose. The original application may be converted statically by another application by translating source code statements to markup language statements. Alternatively, the original application is translated dynamically by executing the original application in an execution environment capable of translating API invocations to markup language statements. Once an application is written, the application may be translated to a markup language document without requiring the knowledge of markup language syntax. The generated document then contains the flexibility and power of an XML-compatible markup language document that ensures that the document is easily transferable and translatable yet contains graphical capabilities in a well-known syntax.

It is important to note that while the present invention has been described in the context of a fully functioning data processing system, those of ordinary skill in the art will appreciate that the processes of the present invention are capable of being distributed in

Docket No. AT9-98-920

the form of a computer readable medium of instructions and a variety of forms and that the present invention applies equally regardless of the particular type of signal bearing media actually used to carry out the
5 distribution. Examples of computer readable media include recordable-type media such a floppy disc, a hard disk drive, a RAM, and CD-ROMs and transmission-type media such as digital and analog communications links.

The description of the present invention has been
10 presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. The embodiment was chosen and described in
15 order to best explain the principles of the invention, the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments with various modifications as are suited to the particular use contemplated.

20

Docket No. AT9-98-920

CLAIMS:

What is claimed is:

- 5 1. A method of processing a source code statement
written in a programming language, the method comprising
the computer-implemented steps of:
parsing a document type definition file for a markup
language;
10 parsing a source code statement from a source code
file;
selecting an element defined in the document type
definition file based on an association between the
element and an identifier of a routine in the source code
15 statement; and
writing the selected element to a markup language
file.
- 20 2. The method of claim 1 wherein the source code
statement comprises parameters for the routine and
wherein the element comprises an attribute list
corresponding to the parameters.
- 25 3. The method of claim 2 wherein the selected element
written to the markup language file comprises an
attribute list of values for the parameters passed to the
routine.
- 30 4. The method of claim 1 wherein the routine is a
procedure, subroutine, function, method, class, or
software object.

Docket No. AT9-98-920

5. A method of processing a markup language element, the method comprising the computer-implemented steps of:
- 5 parsing a document type definition file for the markup language;
 - parsing a markup language element from a markup language file;
 - selecting an element defined in the document type definition file that is equivalent to the markup language
 - 10 element from the markup language file;
 - generating a source code statement using an identifier of a routine within the selected element; and
 - writing the source code statement to an output file.
- 15 6. A method of generating a markup language file, the method comprising the computer-implemented steps of:
- executing an application program;
 - parsing a document type definition file for a markup language;
 - 20 selecting an element defined in the document type definition file based on a routine called by the application program; and
 - writing the selected element to a markup language file.
- 25 7. The method of claim 6 wherein the element comprises an attribute list corresponding to parameters for the routine.
- 30 8. The method of claim 6 wherein the selected element written to the markup language file comprises an

Docket No. AT9-98-920

attribute list corresponding to values for the parameters passed to the routine.

9. The method of claim 6 wherein the application
5 program is written in Java programming language.
10. The method of claim 9 wherein the routine is an extended class method.
- 10 11. The method of claim 9 wherein the routine is a Graphics class method.
12. A data processing system for processing a source code statement written in a programming language, the
15 data processing system comprising:
 first parsing means for parsing a document type definition file for a markup language;
 second parsing means for parsing a source code statement from a source code file;
20 selecting means for selecting an element defined in the document type definition file based on an association between the element and an identifier of a routine in the source code statement; and
 writing means for writing the selected element to a
25 markup language file.
13. The data processing system of claim 12 wherein the source code statement comprises parameters for the routine and wherein the element comprises an attribute
30 list corresponding to the parameters.

① ② ③

5

10

25

30

parsing means for parsing a document type definition
file for a markup language;

Docket No. AT9-98-920

selecting means for selecting an element defined in the document type definition file based on a routine called by the application program; and

5 writing means for writing the selected element to a markup language file.

18. The data processing system of claim 17 wherein the element comprises an attribute list of parameters for the routine.

10

19. The data processing system of claim 17 wherein the selected element written to the markup language file comprises an attribute list of values for the parameters passed to the routine.

15

20. The data processing system of claim 17 wherein the application program is written in Java programming language.

20

21. The data processing system of claim 20 wherein the routine is an extended class method.

22. The data processing system of claim 20 wherein the routine is a Graphics class method.

25

23. A computer program product in a computer readable medium for use in a data processing system for processing a source code statement written in a programming language, the computer program product comprising:

30

first instructions for parsing a document type definition file for a markup language;

Docket No. AT9-98-920

second instructions for parsing a source code statement from a source code file;

third instructions for selecting an element defined in the document type definition file based on an
5 association between the element and an identifier of a routine in the source code statement; and

fourth instructions for writing the selected element to a markup language file.

10 24. A computer program product on a computer readable medium for use in a data processing system for processing a markup language element, the computer program product comprising:

first instructions for parsing a document type
15 definition file for the markup language;

second instructions for parsing a markup language element from a markup language file;

third instructions for selecting an element defined in the document type definition file that is equivalent
20 to the markup language element from the markup language file;

fourth instructions for generating a source code statement using an identifier of a routine within the selected element; and

25 fifth instructions for writing the source code statement to an output file.

25. A computer program product on a computer readable medium for use in a data processing system for processing
30 a markup language file, the computer program product comprising:

Docket No. AT9-98-920

first instructions for executing an application program;

second instructions for parsing a document type definition file for a markup language;

- 5 third instructions for selecting an element defined in the document type definition file based on a routine called by the application program; and
fourth instructions for writing the selected element to a markup language file.

10

26. A method of processing a source code statement written in a programming language, the method comprising the computer-implemented steps of:

- 15 parsing a grammar input file for a markup language;
parsing a source code statement from a source code file;
selecting a language syntax construct defined in the grammar input file based on an association between the language syntax construct and an identifier of a routine
20 in the source code statement; and
writing the selected language syntax construct to a markup language file.

Case 9:98-cv-01000-01

Docket No. AT9-98-920

ABSTRACT OF THE DISCLOSURE

**METHOD AND APPARATUS FOR CONVERTING PROGRAMS AND SOURCE
5 CODE FILES WRITTEN IN A PROGRAMMING LANGUAGE TO EQUIVALENT
MARKUP LANGUAGE FILES**

A method and apparatus for converting programs and
10 source code files written in a programming language to
equivalent markup language files is provided. The
conversion may be accomplished by a static process or by
a dynamic process. In a static process, a programming
source code file is converted by an application to a
15 markup language file. A document type definition file
for a markup language is parsed; a source code statement
from a source code file is parsed; an element defined in
the document type definition file is selected based on an
association between the element and an identifier of a
20 routine in the source code statement; and the selected
element is written to a markup language file. In a
dynamic process, the program is executed to generate the
markup language file that corresponds to the source code
file or presentation steps of the program. The
25 application program is executed; a document type
definition file for a markup language is provided as
input; an element defined in the document type definition
file is selected based on a routine called by the
application program; and the selected element is written
30 to a markup language file.

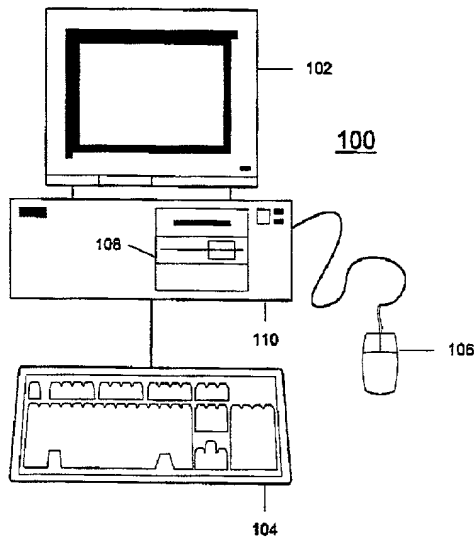


Figure 1
AT9-98-920




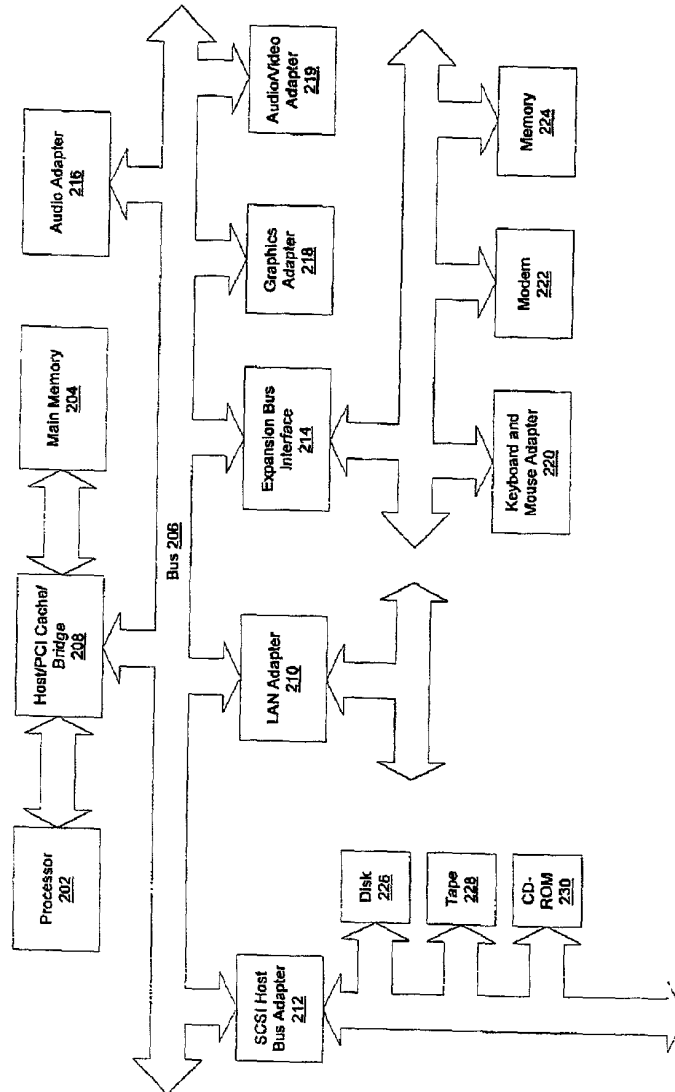



Figure 2
AT9-98-920

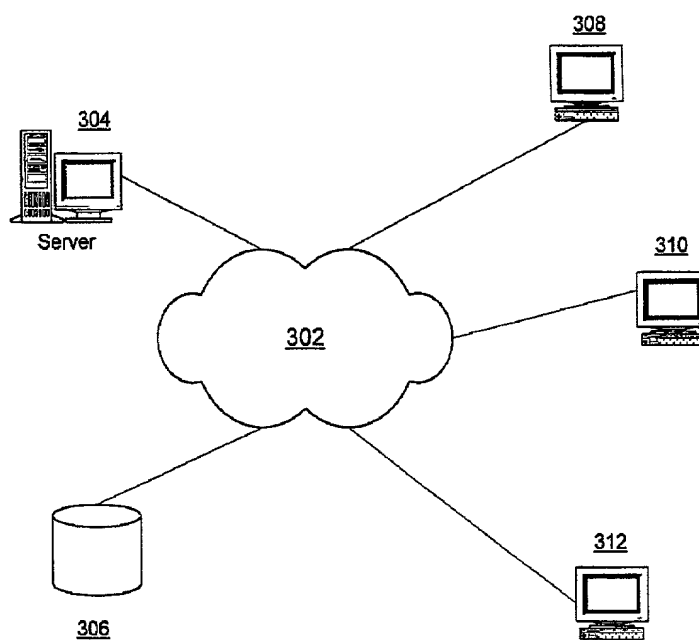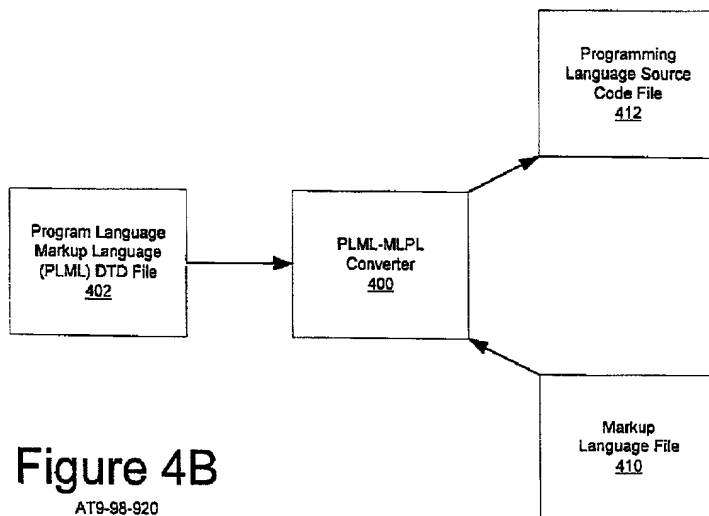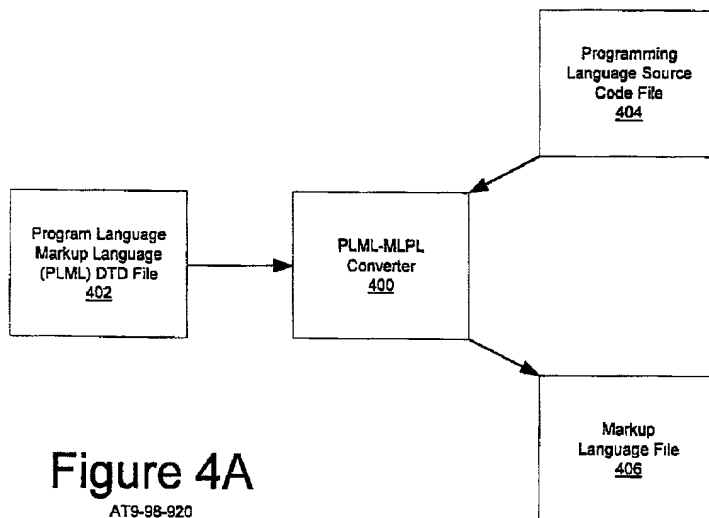


300
Network
Figure 3

AT9-98-920



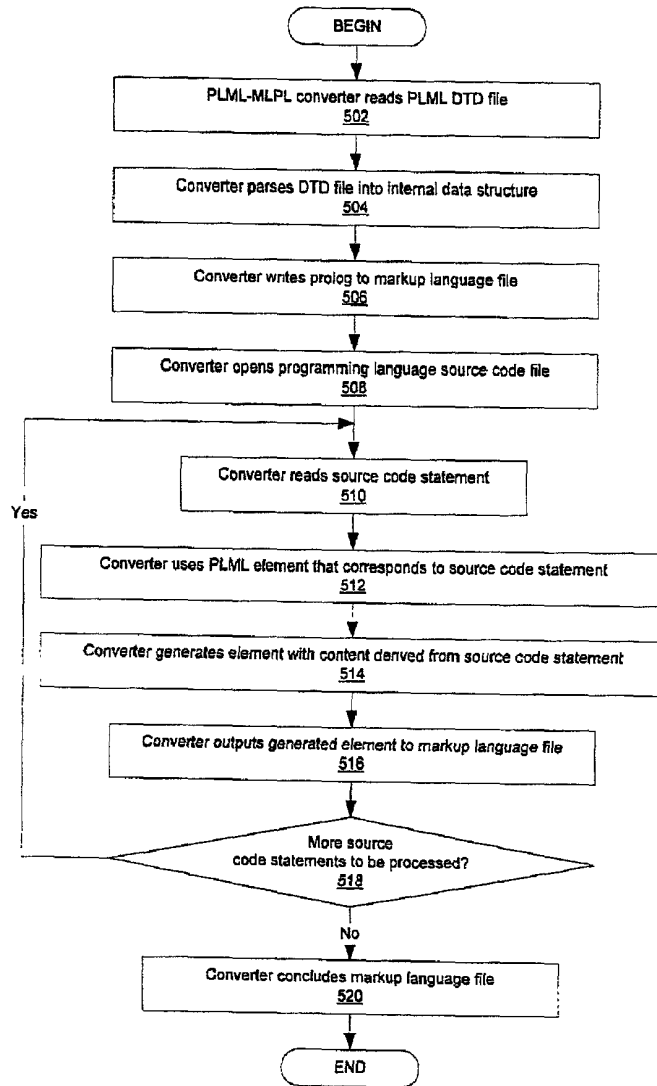**Figure 5**

AT9-98-920

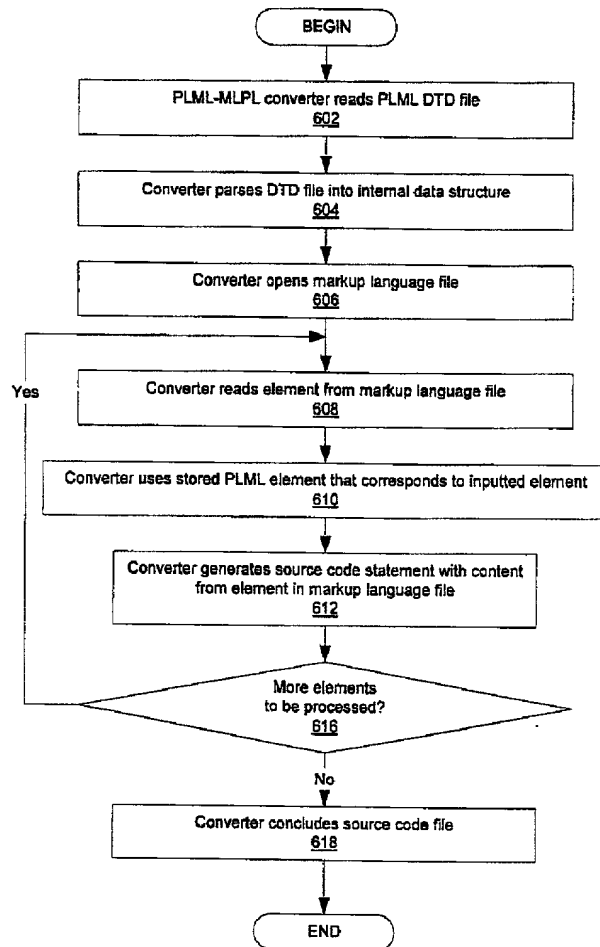**Figure 6**

AT9-98-920

702 { <! ENTITY % base_content_model '(functionA | functionB)*'>

704 { <! ELEMENT pml % base_content_model;>

706 { <! ELEMENT functionA EMPTY>
<! ATTLIST functionA arg1 CDATA #REQUIRED
arg2 CDATA #REQUIRED
>

708 { <! ELEMENT functionB EMPTY>
<! ATTLIST functionB arg1 CDATA #REQUIRED
>
<!-- End of DTD for Programming Language Markup Language-->

Figure 7

AT9-98-920

800 {
802 { main programA ({
integer temp;
initProg ();
804 { temp = functionA (5,7);
806 { temp = functionB (25);
}

Figure 8

AT9-98-920

900 {
 902 { < ? plml version = "1.0"?>
 < ! DOCTYPE plml SYSTEM "plml.dtd">
 904 { < plml>
 906 { < ! -- main programA (){ -->
 < ! -- integer temp; -->
 < ! -- initProg (); -->
 908 { < functionA arg1="5" arg2="7" />
 910 { < functionB arg1="25" />
 912 { < ! -- } -->
 914 { < / plml >

Figure 9A

AT9-98-920

920 {
 922 { < ? plml version = "1.0"?>
 < ! DOCTYPE plml SYSTEM "plml.dtd">
 924 { < plml >
 926 { < functionA arg1="5" arg2="7" />
 928 { < functionB arg1="25" />
 930 { < /plml >

Figure 9B

AT9-98-920

900 {

902 { < ? pml version = "1.0"?>
< ! DOCTYPE pml SYSTEM "pml.dtd">

904 { < pml >

906 { < ! -- main programA () { -->
< ! -- integer temp; -->
< ! -- initProg (); -->

908 { < functionA arg1="5" arg2="7" />

910 { < functionB arg1="25" />

912 { < ! -- } -->

914 { < / pml >

Figure 9A

AT9-98-920

920 {

922 { < ? pml version = "1.0"?>
< ! DOCTYPE pml SYSTEM "pml.dtd">

924 { < pml >

926 { < functionA arg1="5" arg2="7" />

928 { < functionB arg1="25" />

930 { < / pml >

Figure 9B

AT9-98-920

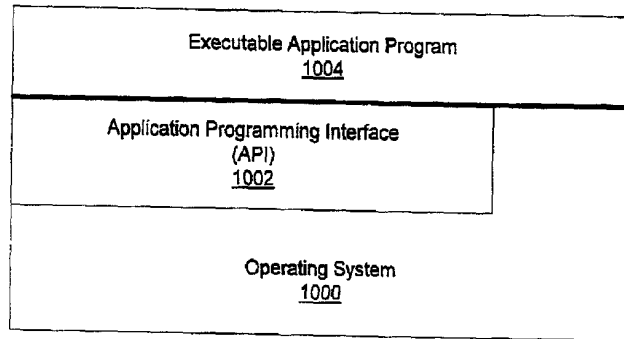


Figure 10A

AT9-98-920

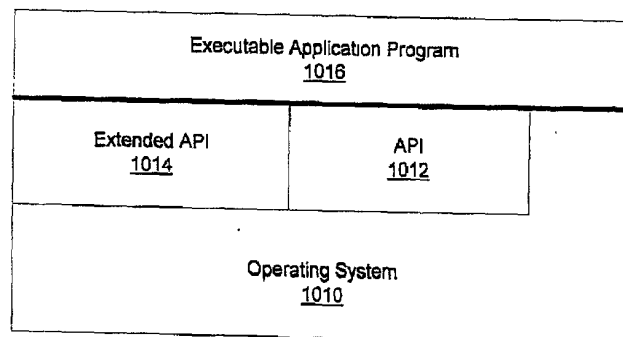
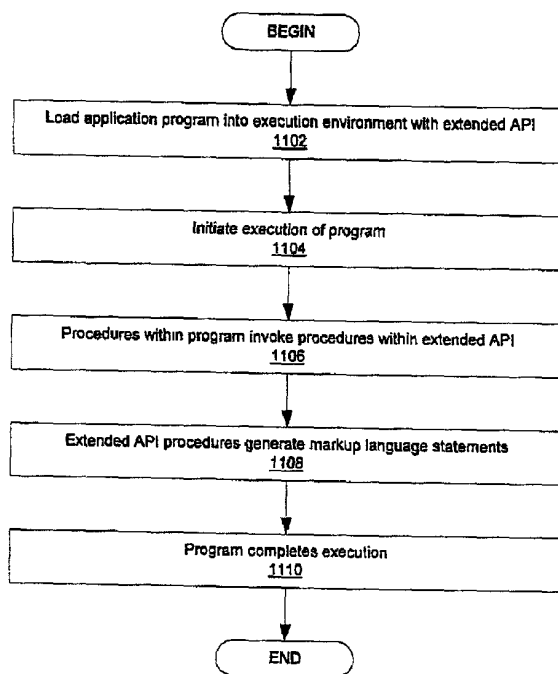
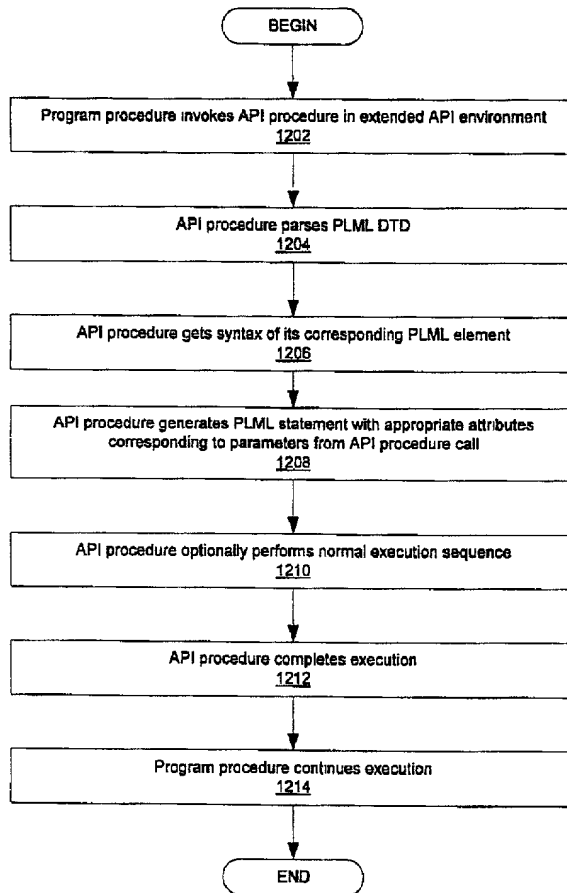


Figure 10B

AT9-98-920

**Figure 11**

AT9-98-920

**Figure 12**

AT9-98-920

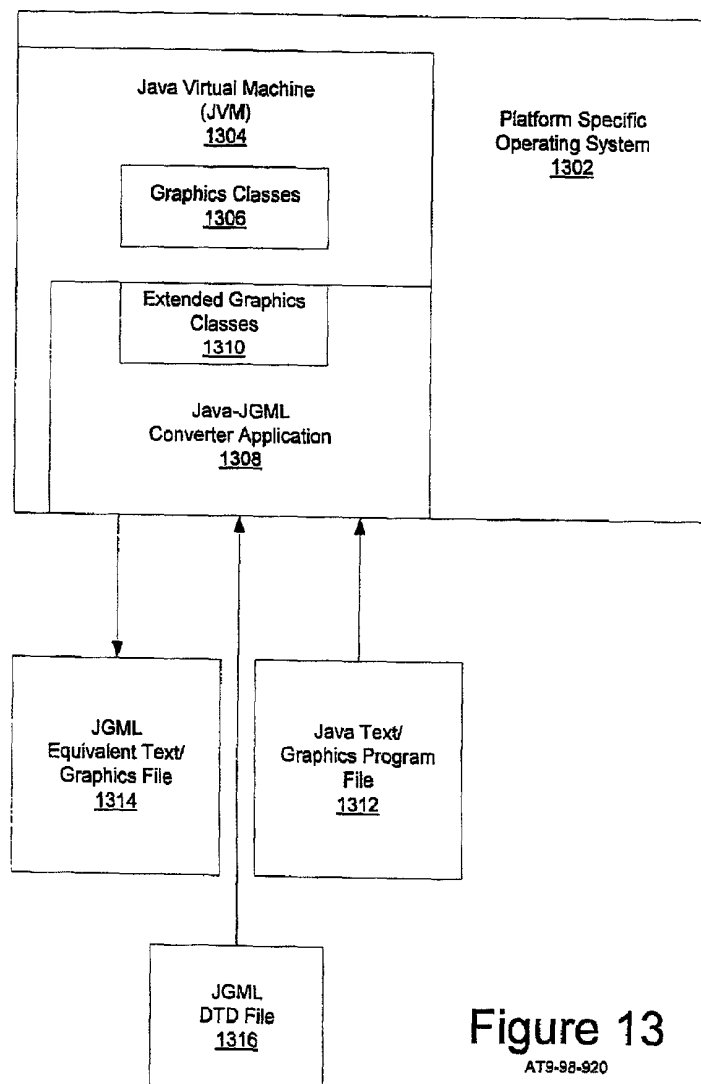


Figure 13
AT9-98-920

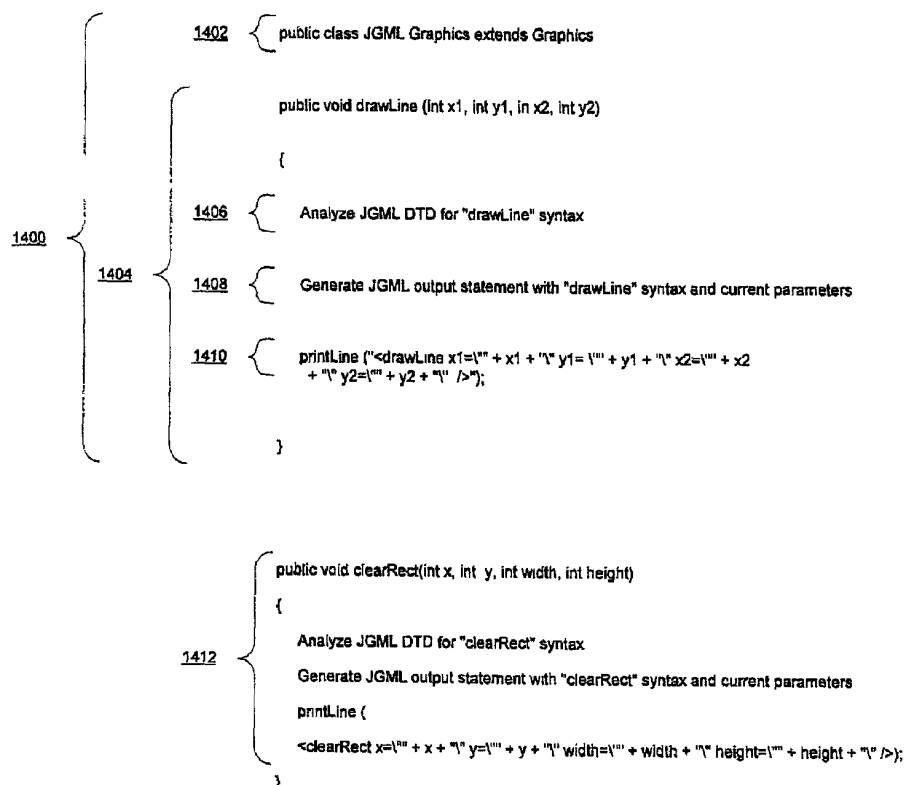


Figure 14

AT9-98-920

```

<!-- Java Graphics Markup Language (JGML) Document Type Definition (DTD) -->
<!ENTITY % base_content_model
'(copyArea | drawLine | fillRect | drawRect | clearRect |
drawRoundRect | fillRoundRect | draw3Drect | fill3Drect|
drawOval | fillOval | drawArc | fillArc | drawPolyline|
drawPolygon | fillPolygon | drawString | drawChars|
drawBytes | drawImage | dispose | finalize | clipRect|
setClip | setColor | setPaintMode | translate | setXORMode |
setFont)*'
>
<!ELEMENT jgml %base_content_model;>
<!ELEMENT copyArea EMPTY>
<ATTLIST
    copyArea
        x          CDATA          #REQUIRED
        y          CDATA          #REQUIRED
        width      CDATA          #REQUIRED
        height     CDATA          #REQUIRED
        dx         CDATA          #REQUIRED
        dy         CDATA          #REQUIRED
>
<!ELEMENT drawLine EMPTY>
<ATTLIST
    drawLine
        x1         CDATA          #REQUIRED
        y1         CDATA          #REQUIRED
        x2         CDATA          #REQUIRED
        y2         CDATA          #REQUIRED
>
<!ELEMENT fillRect EMPTY>
<ATTLIST
    fillRect
        x          CDATA          #REQUIRED
        y          CDATA          #REQUIRED
        width      CDATA          #REQUIRED
        height     CDATA          #REQUIRED
>
<!ELEMENT drawRect EMPTY>
<ATTLIST
    drawRect
        x          CDATA          #REQUIRED
        y          CDATA          #REQUIRED
        width      CDATA          #REQUIRED
        height     CDATA          #REQUIRED
>
<!ELEMENT clearRect EMPTY>
<ATTLIST
    clearRect
        x          CDATA          #REQUIRED
        y          CDATA          #REQUIRED
        width      CDATA          #REQUIRED
        height     CDATA          #REQUIRED
>

```

Figure 15A

AT9-98-920


```

<|ELEMENT drawRoundRect    EMPTY>
<|ATTLIST
    drawRoundRect          x            CDATA    #REQUIRED
                           y            CDATA    #REQUIRED
                           width        CDATA    #REQUIRED
                           height      CDATA    #REQUIRED
                           arcWidth    CDATA    #REQUIRED
                           arcHeight   CDATA    #REQUIRED
>
<|ELEMENT fillRoundRect    EMPTY>
<|ATTLIST
    fillRoundRect          x            CDATA    #REQUIRED
                           y            CDATA    #REQUIRED
                           width        CDATA    #REQUIRED
                           height      CDATA    #REQUIRED
                           arcWidth    CDATA    #REQUIRED
                           arcHeight   CDATA    #REQUIRED
>
<|ELEMENT draw3DRect       EMPTY>
<|ATTLIST
    draw3DRect             x            CDATA    #REQUIRED
                           y            CDATA    #REQUIRED
                           width        CDATA    #REQUIRED
                           height      CDATA    #REQUIRED
                           raised       CDATA    #REQUIRED
>
<|ELEMENT fill3DRect       EMPTY>
<|ATTLIST
    fill3DRect             x            CDATA    #REQUIRED
                           y            CDATA    #REQUIRED
                           width        CDATA    #REQUIRED
                           height      CDATA    #REQUIRED
                           raised       CDATA    #REQUIRED
>
<|ELEMENT drawOval         EMPTY>
<|ATTLIST
    drawOval               x            CDATA    #REQUIRED
                           y            CDATA    #REQUIRED
                           width        CDATA    #REQUIRED
                           height      CDATA    #REQUIRED
>
<|ELEMENT fillOval         EMPTY>
<|ATTLIST
    fillOval               x            CDATA    #REQUIRED
                           y            CDATA    #REQUIRED
                           width        CDATA    #REQUIRED
                           height      CDATA    #REQUIRED
>

```

Figure 15B

AT9-98-920

<!ELEMENT drawArc	EMPTY>		
<!ATTLIST			
drawArc	x	CDATA	#REQUIRED
	y	CDATA	#REQUIRED
	width	CDATA	#REQUIRED
	height	CDATA	#REQUIRED
	startAngle	CDATA	#REQUIRED
	arcAngle	CDATA	#REQUIRED
>			
<!ELEMENT fillArc	EMPTY>		
<!ATTLIST			
fillArc	x	CDATA	#REQUIRED
	y	CDATA	#REQUIRED
	width	CDATA	#REQUIRED
	height	CDATA	#REQUIRED
	startAngle	CDATA	#REQUIRED
	arcAngle	CDATA	#REQUIRED
>			
<!ELEMENT drawPolyLine	EMPTY>		
<!ATTLIST			
drawPolyLine	xPoints	CDATA	#REQUIRED
	yPoints	CDATA	#REQUIRED
	nPoints	CDATA	#REQUIRED
>			
<!ELEMENT drawPolygon	EMPTY>		
<!ATTLIST			
drawPolygon	xPoints	CDATA	#IMPLIED
	yPoints	CDATA	#IMPLIED
	nPoints	CDATA	#IMPLIED
	p	CDATA	#IMPLIED
>			
<!ELEMENT fillPolygon	EMPTY>		
<!ATTLIST			
fillPolygon	xPoints	CDATA	#IMPLIED
	yPoints	CDATA	#IMPLIED
	nPoints	CDATA	#IMPLIED
	Polygon	CDATA	#IMPLIED
>			
<!ELEMENT drawString	EMPTY>		
<!ATTLIST			
drawString	str	CDATA	#REQUIRED
	x	CDATA	#REQUIRED
	y	CDATA	#REQUIRED
>			

Figure 15C

AT9-98-920

```

<!ELEMENT drawChars      EMPTY>
<!ATTLIST
    drawChars      data      CDATA      #REQUIRED
                   offset    CDATA      #REQUIRED
                   length    CDATA      #REQUIRED
                   x          CDATA      #REQUIRED
                   y          CDATA      #REQUIRED
>
<!ELEMENT drawBytes      EMPTY>
<!ATTLIST
    drawBytes      offset    CDATA      #REQUIRED
                   length    CDATA      #REQUIRED
                   x          CDATA      #REQUIRED
                   y          CDATA      #REQUIRED
>
<!ELEMENT drawImage      EMPTY>
<!ATTLIST
    drawImage      img       CDATA      #REQUIRED
                   x          CDATA      #IMPLIED
                   y          CDATA      #IMPLIED
                   width      CDATA      #IMPLIED
                   height     CDATA      #IMPLIED
                   dx1         CDATA      #IMPLIED
                   dy1         CDATA      #IMPLIED
                   dx2         CDATA      #IMPLIED
                   dy2         CDATA      #IMPLIED
                   sx1         CDATA      #IMPLIED
                   sy1         CDATA      #IMPLIED
                   sx2         CDATA      #IMPLIED
                   sy2         CDATA      #IMPLIED
                   bgcolor     CDATA      #IMPLIED
                   observer    CDATA      #REQUIRED
>
<!ELEMENT dispose      EMPTY>
<!ELEMENT finalize     EMPTY>
<!ELEMENT clipRect     EMPTY>
<!ATTLIST
    clipRect      x          CDATA      #REQUIRED
                   y          CDATA      #REQUIRED
                   width      CDATA      #REQUIRED
                   height     CDATA      #REQUIRED
>

```

Figure 15D

AT9-98-920

```

<!ELEMENT setClip          EMPTY>
<!-- ATTLIST
      setClip              x          CDATA      #IMPLIED
                          y          CDATA      #IMPLIED
                          width      CDATA      #IMPLIED
                          height     CDATA      #IMPLIED
                          clip       CDATA      #IMPLIED
-->
<!ELEMENT setColor          EMPTY>
<!-- ATTLIST
      setColor              color      CDATA      #REQUIRED
-->
<!ELEMENT setPaintmode      EMPTY>
<!-- ATTLIST
      translate              x          CDATA      #REQUIRED
                          y          CDATA      #REQUIRED
-->
<!ELEMENT setXORMode        EMPTY>
<!-- ATTLIST
      setXORMode            cl         CDATA      #REQUIRED
-->
<!ELEMENT setFont           EMPTY>
<!-- ATTLIST
      setFont                font      CDATA      #REQUIRED
-->
<!-- End of DTD for Java Graphics Markup Language -->

```

Figure 15E

AT9-98-920

- **clearRect** (int, int, int, int)
Clears the specified rectangle by filling it with the background color of the current drawing surface.
- **clipRect** (int, int, int, int)
Intersects the current clip with the specified rectangle.
- **copyArea** (int, int, int, int, int, int)
Copies an area of the component by a distance specified by dx and dy.
- **create** ()
Creates a new Graphics object that is a copy of this Graphics object.
- **create** (int, int, int, int)
Creates a new Graphics object based on this Graphics object, but with a new translation and clip area.
- **dispose** ()
Disposes of this graphics context and releases any system resources that it is using.
- **draw3DRect** (int, int, int, int, boolean)
Draws a 3-D highlighted outline of the specified rectangle.
- **drawArc** (int, int, int, int, int, int)
Draws the outline of a circular or elliptical arc covering the specified rectangle.
- **drawBytes** (byte[], int, int, int, int)
Draws the text given by the specified byte array, using this graphics context's current font and color.
- **drawChars** (char[], int, int, int, int)
Draws the text given by the specified character array, using this graphics context's current font and color.
- **drawImage** (Image, int, int, Color, ImageObserver)
Draws as much of the specified image as is currently available.
- **drawImage** (Image, int, int, int, int, Color, ImageObserver)
Draws as much of the specified image as has already been scaled to fit inside the specified rectangle.
- **drawImage** (Image, int, int, int, int, ImageObserver)
Draws as much of the specified image as has already been scaled to fit inside the specified rectangle.
- **drawImage** (Image, int, int, int, int, int, int, int, Color, ImageObserver)
Draws as much of the specified area of the specified image as is currently available, scaling it on the fly to fit inside the specified area of the destination drawable surface.
- **drawImage** (Image, int, int, int, int, int, int, int, ImageObserver)
Draws as much of the specified area of the specified image as is currently available, scaling it on the fly to fit inside the specified area of the destination drawable surface.
- **drawLine** (int, int, int, int)
Draws a line, using the current color, between the points (x1, y1) and (x2, y2) in this graphics context's coordinate system.
- **drawOval** (int, int, int, int)
Draws the outline of an oval.
- **drawPolygon** (int[], int[], int)
Draws a closed polygon defined by arrays of x and y coordinates.
- **drawPolygon** (Polygon)
Draws the outline of a polygon defined by the specified Polygon object.
- **drawPolyline** (int[], int[], int)
Draws a sequence of connected lines defined by arrays of x and y coordinates.
- **drawRect** (int, int, int, int)
Draws the outline of the specified rectangle.
- **drawRoundRect** (int, int, int, int, int, int)
Draws an outlined round-cornered rectangle using this graphics context's current color.

Figure 16A

AT9-98-920


65333 " 65333 65333

- **drawString** (String, int, int)
Draws the text given by the specified string, using this graphics context's current font and color.
- **fill3DRect** (int, int, int, int, boolean)
Paints a 3-D highlighted rectangle filled with the current color.
- **fillArc** (int, int, int, int, int, int)
Fills a circular or elliptical arc covering the specified rectangle.
- **fillOval** (int, int, int, int)
Fills an oval bounded by the specified rectangle with the current color.
- **fillPolygon** (int[], int[], int)
Fills a closed polygon defined by arrays of x and y coordinates.
- **fillPolygon** (Polygon)
Fills the polygon defined by the specified Polygon object with the graphics context's current color.
- **fillRect** (int, int, int, int)
Fills the specified rectangle.
- **fillRoundRect** (int, int, int, int, int, int)
Fills the specified rounded corner rectangle with the current color.
- **finalize** ()
Disposes of this graphics context once it is no longer referenced.
- **getClip** ()
Gets the current clipping area.
- **getClipBounds** ()
Returns the bounding rectangle of the current clipping area.
- **getClipRect** ()
Deprecated.
- **getColor** ()
Gets this graphics context's current color.
- **getFont** ()
Gets the current font.
- **getFontMetrics** ()
Gets the font metrics of the current font.
- **getFontMetrics** (Font)
Gets the font metrics for the specified font.
- **setClip** (int, int, int, int)
Sets the current clip to the rectangle specified by the given coordinates.
- **setClip** (Shape)
Sets the current clipping area to an arbitrary clip shape.
- **setColor** (Color)
Sets this graphics context's current
- **setFont** (Font)
Sets this graphics context's font to the specified font.
- **setPaintMode** ()
Sets the paint mode of this graphics context to overwrite the destination with this graphics context's current color.
- **setXORMode** (Color)
Sets the paint mode of this graphics context to alternate between this graphics context's current color and the new specified color.
- **toString** ()
Returns a String object representing this Graphics object's value.
- **translate** (int, int)
Translates the origin of the graphics context to the point (x, y) in the current coordinate system.


Figure 16B

AT9-98-920

2025 RELEASE UNDER E.O. 14176

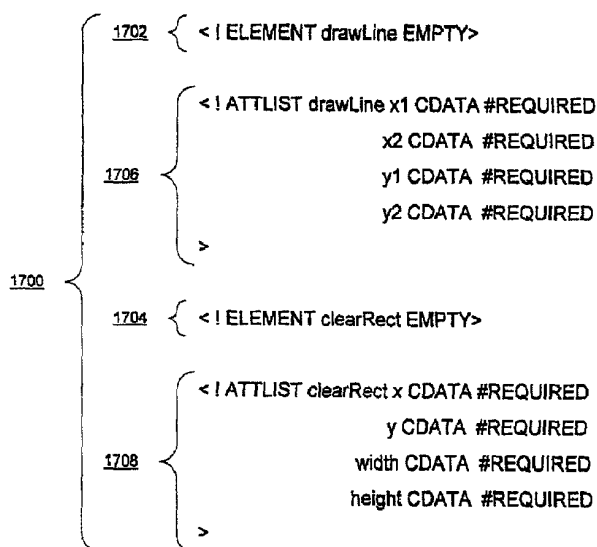**Figure 17**

AT9-98-920

**Figure 18**

AT9-98-920

```
<? xml version="1.0" ? >
<! DOCTYPE jgml SYSTEM "jgml.dtd" >
<jgml >
1900 { 1902 -- < drawLine x1="23" y1="43" x2="50 y2="60" / >
1904 -- < drawLine x1="50" y1="60" x2="27 y2="80" / >
1906 -- < clearRect x="0" y="0" width="10" height="10" / >
</jgml >
```

Figure 19
AT9-98-920

AT9-98-920

**DECLARATION AND POWER OF ATTORNEY FOR
PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR CONVERTING PROGRAMS AND SOURCE CODE FILES WRITTEN IN A PROGRAMMING LANGUAGE TO EQUIVALENT MARKUP LANGUAGE FILES

the specification of which (check one)

X is attached hereto.

_____ was filed on _____
as Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

_____ Yes _____ No
(Number) (Country) (Day/Month/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any

United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial #)	(Filing Date)	(Status)
------------------------	---------------	----------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; Thomas E. Tyson, Reg. No. 28,543; James H. Barksdale, Jr., Reg. No. 24,091; Casimer K. Salys, Reg. No. 28,900; Robert M. Carwell, Reg. No. 28,499; Douglas H. Lefevre, Reg. No. 26,193; Jeffrey S. LaBaw, Reg. No. 31,633; David A. Mims, Jr., Reg. 32,708; Volel Emile, Reg. No. 39,969; Anthony V. England, Reg. No. 35,129; Leslie A. Van Leeuwen, Reg. No. 42,196; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; Marilyn S. Dawkins, Reg. No. 31,140; Duke W. Yee, Reg. No. 34,285; Mark E. McBurney, Reg. No. 33,114; and Colin P. Cahoon, Reg. No. 38,836; Joseph R. Burwell, Reg. No. P-44,468; Rudolph J. Buchel, Reg. No. P-43,448; Stephen R. Loe, Reg. No. 43-757.

Send correspondence to: Duke W. Yee, Carstens, Yee & Cahoon, LLP, P.O. Box 802334, Dallas, Texas 75380 and direct all telephone calls to Duke W. Yee, (972) 362-2001

FULL NAME OF SOLE OR FIRST INVENTOR: Michael Richard Cooper

INVENTORS SIGNATURE: Michael Richard Cooper DATE: 5/5/99

RESIDENCE: 12804 Medina River Way
Austin, Texas 78732

DOCKET NUMBER: AT9-98-920

CITIZENSHIP: United States

POST OFFICE ADDRESS: SAME AS ABOVE

FULL NAME OF SECOND INVENTOR: Rabindranath Dutta

INVENTORS SIGNATURE: Rabindranath Dutta DATE: 5/4/1999

RESIDENCE: 3401 Parmer Lane W., #835
Austin, Texas 78727

CITIZENSHIP: India

POST OFFICE ADDRESS: SAME AS ABOVE

FULL NAME OF THIRD INVENTOR: Kelvin Roderick Lawrence

INVENTORS SIGNATURE: Kelvin Roderick Lawrence DATE: 5/5/1999

RESIDENCE: 1013 Long Cove
Round Rock, Texas 78664

CITIZENSHIP: United Kingdom

POST OFFICE ADDRESS: SAME AS ABOVE